

B251TX 極超微粒鎢鋼塗層圓頭立銑刀

Ball Nose End Mills

SMG
CarbideAlTiSiN
TX

Type of Operation



Work Material

P	H	M	K	N	S
	●				


H	硬化鋼 <48HRC Hardened Steel
---	------------------------------

H	硬化鋼 <56HRC Hardened Steel
---	------------------------------

H	硬化鋼 <68HRC Hardened Steel
---	------------------------------

Feature of product:

微小徑短槽強力圓頭立銑刀
採用SMG特極超微粒碳化鎢鋼材料，並搭配奈米多層鍍塗層具有優異的潤滑及耐磨性。
S型球頭幾何設計。
具有良好的刀具壽命。
規格最小達0.1mm。
適用於高硬度材料、高精密模具精微加工。

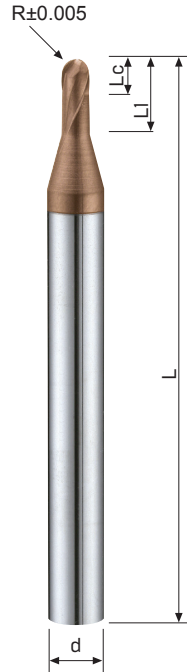

Code No. B251TX-Dc

Dc 0 -0.02	R ±0.005	Lc mm	L mm	d h6	L1 mm	AlTiSiN B251TX
0.1	0.05R	0.1	50	4	0.3	●
0.2	0.1R	0.2	50	4	0.5	●
0.3	0.15R	0.3	50	4	0.8	●
0.4	0.2R	0.4	50	4	1	●
0.5	0.25R	0.5	50	4	1.3	●
0.6	0.3R	0.6	50	4	1.5	●
0.8	0.4R	0.8	50	4	2	●
1	0.5R	1	50	4	2.5	●
1.5	0.75R	1.5	50	4	3.8	●
2	1R	2	50	6	5	●
3	1.5R	3	60	6	8	●
4	2R	4	60	6	10	●
5	2.5R	5	60	6	12	●
6	3R	6	60	6	15	●

B251TX 切削條件參考表

Recommended Milling Conditions

Finishing 精加工

被削材 Work Material		GR.5 硬化鋼 Hardened Steel (38~48HRC)		GR.6 硬化鋼 Hardened Steel (48~56HRC)		GR.7 硬化鋼 Hardened Steel (56~68HRC)	
切削速度 Vc m/min		130		120		90	
型號 Code No.	刃徑 Dc	RPM 迴轉速度 [min-1]	Feed 進給速度 [mm/min]	RPM 迴轉速度 [min-1]	Feed 進給速度 [mm/min]	RPM 迴轉速度 [min-1]	Feed 進給速度 [mm/min]
B251TX-R0.15	0.3	40,000	500	30,000	400	30,000	350
B251TX-R0.2	0.4	40,000	500	30,000	400	30,000	350
B251TX-R0.25	0.5	40,000	600	30,000	500	30,000	400
B251TX-R0.3	0.6	30,000	600	30,000	500	30,000	500
B251TX-R0.4	0.8	30,000	700	20,000	600	30,000	600
B251TX-R0.5	1	20,000	800	15,000	750	15,000	750
B251TX-R0.75	1.5	18,000	1,400	15,000	900	14,000	900
B251TX-R1	2	15,000	1,600	14,000	1,200	14,000	1,260
B251TX-R1.5	3	13,000	1,700	12,500	1,500	10,000	1,200
B251TX-R2	4	11,000	1,680	10,000	1,560	7,200	1,080
B251TX-R2.5	5	10,000	1,600	9,600	1,440	6,800	1,080
B251TX-R3	6	6,900	1,450	6,400	1,280	4,800	960
切入深度 (mm)		ap:0.02D		ap:0.02D		ap:0.02D	
		ae:0.02D		ae:0.02D		ae:0.02D	

High-speed machining 高速加工

被削材 Work Material		GR.5 硬化鋼 Hardened Steel (38~48HRC)		GR.6 硬化鋼 Hardened Steel (48~56HRC)		GR.7 硬化鋼 Hardened Steel (56~68HRC)	
切削速度 Vc m/min		200		175		120	
型號 Code No.	刃徑 Dc	RPM 迴轉速度 [min-1]	Feed 進給速度 [mm/min]	RPM 迴轉速度 [min-1]	Feed 進給速度 [mm/min]	RPM 迴轉速度 [min-1]	Feed 進給速度 [mm/min]
B251TX-R0.15	0.3	50,000	950	40,000	720	40,000	600
B251TX-R0.2	0.4	50,000	1,200	40,000	900	40,000	800
B251TX-R0.25	0.5	50,000	1,400	40,000	1,000	40,000	930
B251TX-R0.3	0.6	50,000	1,600	40,000	1,200	40,000	1,300
B251TX-R0.4	0.8	50,000	2,000	40,000	1,500	40,000	1,400
B251TX-R0.5	1	50,000	2,500	40,000	1,900	32,000	1,400
B251TX-R0.75	1.5	46,000	3,000	32,000	2,000	25,000	1,600
B251TX-R1	2	35,000	3,300	25,000	2,500	20,000	1,750
B251TX-R1.5	3	23,000	3,200	19,000	2,500	13,000	1,800
B251TX-R2	4	17,500	3,300	14,000	2,500	9,800	1,600
B251TX-R2.5	5	14,000	3,300	11,000	2,500	7,900	1,700
B251TX-R3	6	11,500	3,000	9,500	2,500	6,500	1,700
切入深度 (mm)		ap:0.02D		ap:0.02D		ap:0.02D	
		ae:0.02D		ae:0.02D		ae:0.02D	

1. Please work with good rigidity / high precision facilities and collet chuck.
2. Please choose proper cutting fluid.
3. The cutting data is reference value only. Please adjust it according to your real working conditions.
4. If RPM is lower the reference value, the Feed rate [fz] and RPM should be reduced by the same proportion.
5. If vibration occurs during cutting, please reduce cutting parameter.

1. 請使用剛性好、精度高的設備和夾具。
2. 請選擇適用於工件材料的切削液。
3. 此切削條件表中的數值為切削條件的基準值，實際加工時，請考慮加工形狀、目的、使用機台等因素，對切削條件進行調整。
4. 如果機台轉速低於表中所列數值，則進給速度應與轉速按同一比例降低。
5. 切削加工時如果發生振顫，請降低切削條件。