


超微粒鎢鋼塗層倒角用立銑刀

Double Angle Cutter


4 Flute Chamfering 30°&60°&90°&120°

MG
CarbideAlTiCrN
HX

Code No: E100HX-30°-DC×L1
 E100HX-60°-DC×L1
 E100HX-90°-DC×L1
 E100HX-120°-DC×L1

Cutter Width(Lc)

Angle	30°	60°	90°	120°
1/16	0.0080	0.0180	0.0310	-
5/64	0.0100	0.0230	0.0390	-
3/32	0.0120	0.0270	0.0470	-
1/8	0.0170	0.0360	0.0620	0.1090
5/32	-	0.0450	0.0780	-
3/16	0.0250	0.0550	0.0930	0.1630
1/4	0.0330	0.0720	0.1250	0.2160
5/16	-	0.0720	0.1250	-
3/8	0.0330	0.0720	0.1250	0.2160
1/2	0.0500	0.1090	0.1870	0.3250

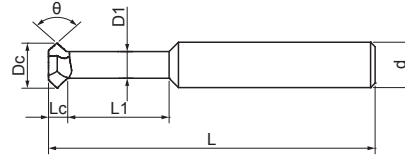

Work Material

P	H	M	K	N	S
●	●	○	○	○	○

P	鋼鐵 Steel
---	-------------

H	硬化鋼 <52HRC Hardened Steel
---	------------------------------

M	不銹鋼 Stainless Steel
---	------------------------

K	鑄鐵 Cast Iron
---	-----------------

N	鋁 Aluminium
---	----------------

N	銅 Copper
---	-------------

S	鈦合金 Titanium
---	-----------------

S	高溫合金 High Temp Alloys
---	--------------------------

Tolerance: DC

All Sizes: +0/-0.002"

Feature of product:

使用在高性能應用。

具有極高的耐熱性，可用於鋼鐵、不銹鋼、鑄鐵，有色金屬和其他難加工的材料。

Standard & Long Length

Dc 0 -0.002"	L Inch	d h6	L1 Inch	D1 Inch	Z Inch	AlTiCrN	AlTiCrN	AlTiCrN	AlTiCrN
						E100HX-30°	E100HX-60°	E100HX-90°	E100HX-120°
1/16	1-1/2	1/8	1/16	1/32	2	○	○	●	○
1/16	1-1/2	1/8	3/32	1/32	2	○	●	●	○
1/16	1-1/2	1/8	1/8	1/32	2	○	○	●	○
1/16	1-1/2	1/8	5/32	1/32	2	○	●	●	○
1/16	1-1/2	1/8	1/4	1/32	2	○	○	●	○
1/16	1-1/2	1/8	3/8	1/32	2	○	○	●	○
5/64	1-1/2	1/8	5/64	0.0390	2	○	○	●	○
5/64	1-1/2	1/8	1/8	0.0390	2	○	●	●	○
5/64	1-1/2	1/8	3/16	0.0390	2	○	○	●	○
5/64	1-1/2	1/8	1/4	0.0390	2	○	○	●	○
5/64	1-1/2	1/8	5/16	0.0390	2	○	○	●	○
3/32	1-1/2	1/8	3/32	3/64	2	○	○	●	○
3/32	1-1/2	1/8	1/8	3/64	2	○	●	●	○
3/32	1-1/2	1/8	1/4	3/64	2	○	○	●	○
3/32	1-1/2	1/8	5/16	3/64	2	○	○	●	○
3/32	1-1/2	1/8	3/8	3/64	2	○	○	●	○
3/32	1-1/2	1/8	1/2	3/64	2	○	○	●	○
3/32	2	1/8	5/8	3/64	2	○	○	●	○
3/32	2	1/8	3/4	3/64	2	○	○	●	○
1/8	1-1/2	1/8	1/8	1/16	4	○	●	●	○
1/8	1-1/2	1/8	3/16	1/16	4	●	●	●	●
1/8	1-1/2	1/8	1/4	1/16	4	○	○	●	○
1/8	1-1/2	1/8	5/16	1/16	4	○	●	●	○
1/8	1-1/2	1/8	3/8	1/16	4	○	○	●	○
1/8	2	1/8	1/2	1/16	4	●	●	●	●
1/8	2	1/8	5/8	1/16	4	○	○	●	○
1/8	2	1/8	3/4	1/16	4	○	○	●	○
1/8	2	1/8	7/8	1/16	4	○	●	●	○
1/8	2	1/8	1	1/16	4	○	○	●	○
5/32	2	3/16	5/32	5/64	4	○	○	●	○
5/32	2	3/16	1/4	5/64	4	○	●	●	○
5/32	2	3/16	3/8	5/64	4	○	○	●	○
5/32	2	3/16	1/2	5/64	4	○	○	●	○
5/32	2-1/2	3/16	5/8	5/64	4	○	●	●	○
5/32	2-1/2	3/16	1-1/8	5/64	4	○	○	●	○

超微粒鎢鋼塗層倒角用立銑刀

Double Angle Cutter
4 Flute Chamfering 30°&60°&90°&120°

MG
Carbide

AlTiCrN
HX



Code No: E100HX-30°-DC×L1
E100HX-60°-DC×L1
E100HX-90°-DC×L1
E100HX-120°-DC×L1

Standard & Long Length

Dc 0 -0.002"	L Inch	d h6	L1 Inch	D1 Inch	Z Inch	AlTiCrN E100HX-30°	AlTiCrN E100HX-60°	AlTiCrN E100HX-90°	AlTiCrN E100HX-120°
3/16	2	3/16	3/16	3/32	4	○	●	●	○
3/16	2	3/16	1/4	3/32	4	○	○	●	○
3/16	2	3/16	5/16	3/32	4	●	●	●	●
3/16	2	3/16	3/8	3/32	4	○	○	●	○
3/16	2	3/16	1/2	3/32	4	○	●	●	○
3/16	2-1/2	3/16	3/4	3/32	4	●	●	●	●
3/16	2-1/2	3/16	1	3/32	4	○	●	●	○
3/16	2-1/2	3/16	1-5/16	3/32	4	○	○	●	○
3/16	3	3/16	1-5/8	3/32	4	○	○	●	○
1/4	2	1/4	3/16	1/8	4	○	●	●	○
1/4	2	1/4	1/4	1/8	4	○	○	●	○
1/4	2	1/4	5/16	1/8	4	●	●	●	●
1/4	2	1/4	3/8	1/8	4	○	○	●	○
1/4	2	1/4	1/2	1/8	4	○	○	●	○
1/4	2-1/2	1/4	5/8	1/8	4	●	●	●	●
1/4	2-1/2	1/4	3/4	1/8	4	○	○	●	○
1/4	3	1/4	1	1/8	4	●	●	●	●
1/4	3	1/4	1-1/4	1/8	4	○	○	●	○
1/4	3	1/4	1-3/8	1/8	4	○	●	●	○
1/4	3	1/4	1-3/4	1/8	4	○	●	●	○
1/4	4	1/4	2-1/8	1/8	4	○	○	●	○
5/16	2-1/2	5/16	1/4	3/16	6	○	○	●	○
5/16	2-1/2	5/16	3/8	3/16	6	○	●	●	○
5/16	2-1/2	5/16	5/8	3/16	6	○	○	●	○
5/16	2-1/2	5/16	7/8	3/16	6	○	●	●	○
5/16	3	5/16	1-1/4	3/16	6	○	○	●	○
5/16	3	5/16	1-5/8	3/16	6	○	○	●	○
5/16	3	5/16	2-1/8	3/16	6	○	○	●	○
3/8	2-1/2	3/8	5/16	1/4	6	○	●	●	○
3/8	2-1/2	3/8	3/8	1/4	6	○	○	●	○
3/8	2-1/2	3/8	1/2	1/4	6	●	●	●	●
3/8	2-1/2	3/8	3/4	1/4	6	○	○	●	○
3/8	2-1/2	3/8	1	1/4	6	●	●	●	●
3/8	3-1/2	3/8	1-1/2	1/4	6	●	●	●	●
3/8	3-1/2	3/8	1-3/4	1/4	6	○	○	●	○
3/8	3-1/2	3/8	2	1/4	6	○	●	●	○
3/8	3-1/2	3/8	2-5/16	1/4	6	○	○	●	○
3/8	4	3/8	2-5/8	1/4	6	○	○	●	○
1/2	3	1/2	5/16	5/16	6	○	○	●	○
1/2	3	1/2	1/2	5/16	6	●	●	●	●
1/2	3	1/2	1	5/16	6	●	●	●	●
1/2	3-1/2	1/2	1-1/4	5/16	6	○	○	●	○
1/2	4	1/2	1-1/2	5/16	6	●	●	●	●
1/2	4	1/2	2	5/16	6	○	●	●	○
1/2	4	1/2	2-5/8	5/16	6	○	●	●	○
1/2	6	1/2	3-1/8	5/16	6	○	○	●	○

Work Material

P	H	M	K	N	S
●	●	○	○	○	○

P 鋼鐵
Steel

H 硬化鋼 <52HRC
Hardened Steel

M 不銹鋼
Stainless Steel

K 鑄鐵
Cast Iron

N 鋁
Aluminium

N 銅
Copper

S 鈦合金
Titanium

S 高溫合金
High Temp Alloys

Tolerance: DC
All Sizes: +0/-0.002"

Feature of product:
使用在高性能應用。
具有極高的耐熱性，可用於鋼鐵、
不銹鋼、鑄鐵，有色金屬和其他難
加工的材料。

※ Mark: ○, On request, no stock
※ 記號○, 可訂購規格, 無現貨