






E141-2.0FX / 3.0FX 超微粒鎢鋼塗層多用途立銑刀(C角保護)

Multipurpose End Mills (Chamfer Corner)

MG Carbide **AICrN FX**



Type of Operation



Work Material

P	H	M	K	N	S
●	●	●	●	○	●

P 鋼鐵 Steel

H 硬化鋼 <38HRC Hardened Steel

H 硬化鋼 <48HRC Hardened Steel

M 不銹鋼 Stainless Steel

K 鑄鐵 Cast Iron


N 鋁 Aluminium

N 銅 Copper

S 鈦合金 Titanium


S 鎳 Nickel

S 高溫合金 High Temp Alloys

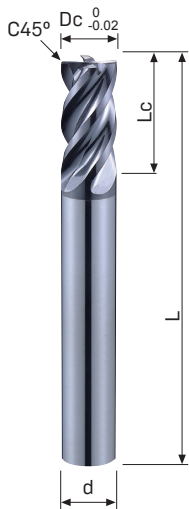

Code No. E141-2.0FX-Dc×C

Dc 0 -0.02	C mm	Lc mm	L mm	d h6	AICrN E141-2.0FX
1	0.01	2	50	4	●
1.5	0.015	3	50	4	●
2	0.02	4	50	4	●
2.5	0.025	5	50	4	●
3	0.03	6	50	6	●
3	0.075	6	50	6	●
4	0.04	8	50	6	●
4	0.1	8	50	6	●
5	0.05	10	50	6	●
5	0.125	10	50	6	●
6	0.06	12	50	6	●
6	0.15	12	50	6	●
8	0.08	16	60	8	●
8	0.2	16	60	8	●
10	0.1	20	75	10	●
10	0.25	20	75	10	●
12	0.12	24	75	12	●
12	0.3	24	75	12	●
16	0.16	32	100	16	●
16	0.4	32	100	16	●
20	0.2	40	100	20	●
20	0.5	40	100	20	●

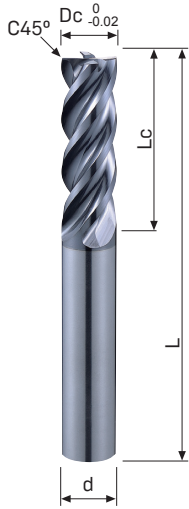

Code No. E141-3.0FX-Dc×C

Dc 0 -0.02	C mm	Lc mm	L mm	d h6	AICrN E141-3.0FX
3	0.03	9	50	6	●
4	0.04	12	50	6	●
5	0.05	15	50	6	●
6	0.06	18	50	6	●
8	0.08	24	65	8	●
10	0.1	30	75	10	●
12	0.12	36	80	12	●
16	0.16	48	100	16	●
20	0.2	60	120	20	●

Feature of product:

4刃多用途立銑刀

採用不等螺旋、不等分割設計，有效抑制振動，刀尖C角保護，大排屑溝槽使其排屑順暢，可應對各式工況工法。

搭配AICrN奈米多層膜塗層，應用於低硬度的碳鋼及合金鋼，適合有雜質碳鋼及合金鋼及不鏽鋼，及易沾黏材料。